


# BS-230

Clinical Chemistry Analyzer

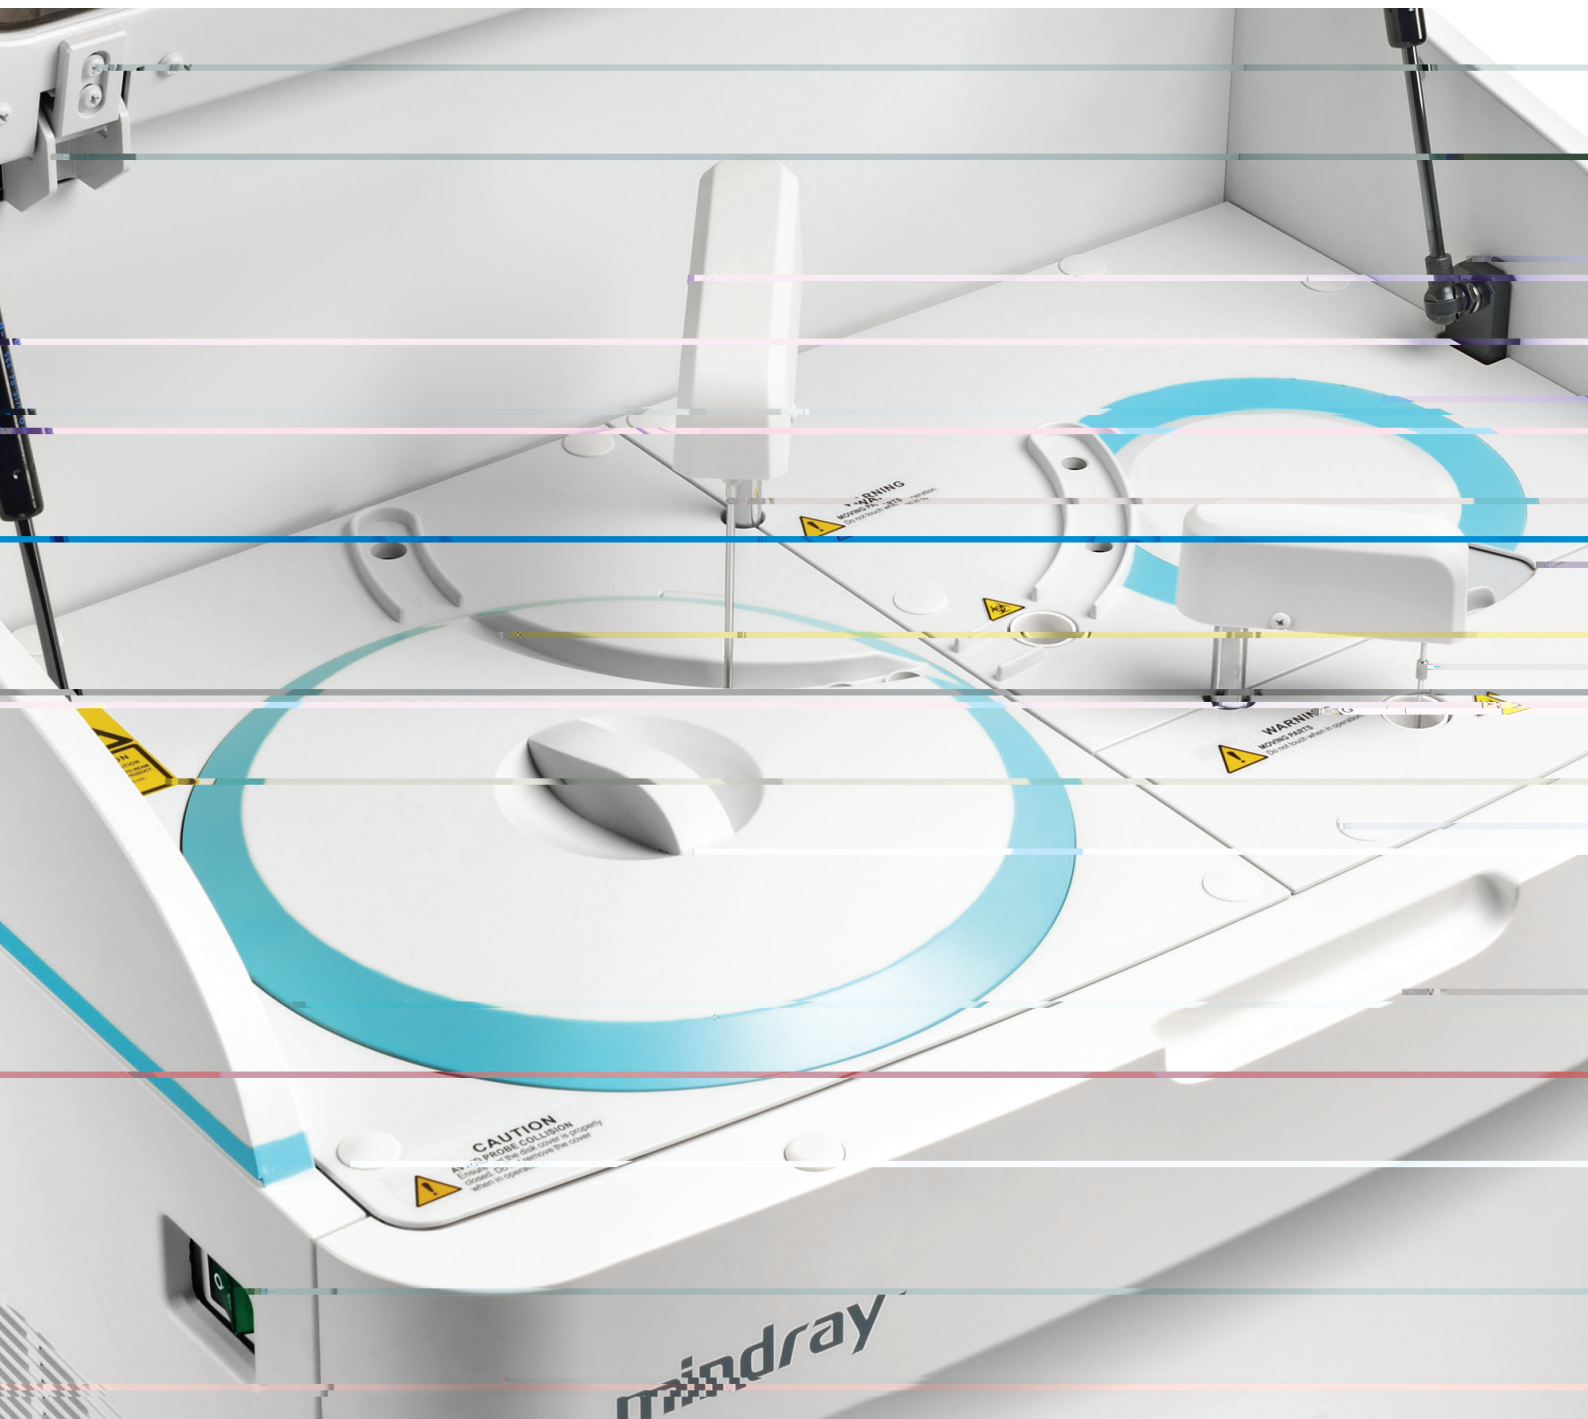

## Technical Specifications

### System function

Automatic, Discrete, Random Access, Bench-top

STAT sample priority

Throughput: Up to 200 tests/hour, up to 400 tests/hour with ISE

Measuring principles: Absorbance photometry, Turbidimetry, Ion Selective Electrode technology

Methodology: End-point, Fixed-time, Kinetic, optional ISE, Single/Dual/ reagent chemistries, monochromatic / bi-chromatic

Original system pack reagent ready to use

Close system and open system is optional

### Reagent/Sample Handling

Reagent/Sample tray: 80 positions for reagents and 40 positions for samples in 24-hour refrigerated compartment (2~12 °C)

Reagent volume: 100~250µl, step by 0.5µl

Sample volume: 2~45µl, step by 0.1µl

Reagent/Sample probe: Liquid level detection, vertical collision protection and inventory checking, reagent pre-warming

Probe cleaning: Automatic washing for interior and exterior  
Carry over < 0.05%

Automatic sample dilution: Pre-dilution and post-dilution

### Internal bar code reader (optional)

Capable to communicate with LIS in bi-directional mode

### Reaction System:

Cuvette: 40 disposable cuvettes

Reaction volume: 100~360µl

Operating temperature: 37 °C ±0.1 °C

### ISE Module (optional)

Measuring K<sup>+</sup>, Na<sup>+</sup>, Cl<sup>-</sup>

### Mixing Unit

Independent mixing bar

### Optical System

Light Source: Halogen-tungsten lamp

Wavelength: 8 wavelengths, 340nm、405nm、450nm、510nm、546nm、578nm、630nm、670nm

Absorption range: 0~4.0 Abs (10mm conversion), resolution 0.0001Abs

Stray Light 5.6Abs

### Control and Calibration

Calibration modes: Linear (one point, two points and multi-points), Logit-Log 4P, Logit-Log 5P, spline, exponential, polynomial, parabola

Control Rules: X-R, L-J, Westgard multi-rule, Cumulative sum check, twin plot

### Operation Unit

Operation system: Windows 8

Interface: RS-232

### Working Conditions

Power Supply: 200~240V, 50/60Hz, ≤1000VA or 100~130V, 60Hz, ≤1000VA

Dimension: 690 mm (length) ×580 mm (depth) ×595 mm (height)

Weight: 47 kg

Water Consumption: ≤ 2 L/H

